

## DS-KAD704Y Two Wire Distributor



- 2-wire IP distributor
- 4-port 2-wire cascade interfaces with device power supply
- 2 cascade interfaces for DS-KAD704Y, DS-KAD706Y & DS-KAD706Y-S series
- 6 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24 VDC input power supply




▪ **Specification**

General	
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90% (no-condensing)
Power supply	24 VDC
Power consumption	CH1 to CH4 < 10 W

▪ **Available Model**

DS-KAD704Y

▪ **Dimension**

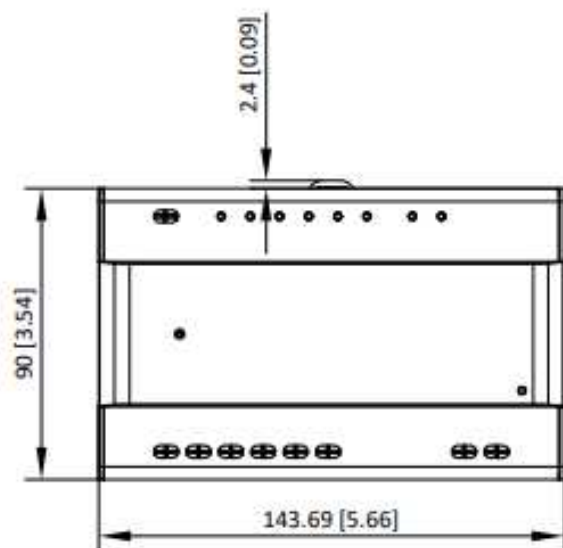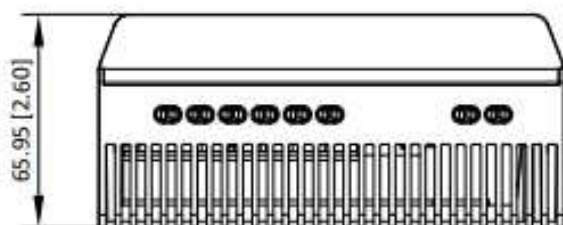

Unit:mm [inch]

SCALE	1:1
-------	-----

- **Accessory**
- **Optional**

<b>DS-KAW30-2N</b> Power Supply unit	<b>DS-KIS702Y-P</b> Two Wire IP Bundle
	

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

