

## DS-D5019QD 19" LCD Monitor

### key Features


- 1366×768 HD display;
- Support 170° wide viewing angle;
- Adopt 3D digital comb filter;
- True color OSD and user-friendly operation menu;
- Built-in speaker;
- 1 channel HDMI 1.3 input interface and support HDCP 1.2;
- Adopt 3D noise reduction technology;
- Support high definition JPEG decoding;
- Support software spread-spectrum technology to reduce EMI radiation;
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge;
- Professional for Video Surveillance application: HDMI and VGA signal input;



### Model:

DS-D5019QD

### Physical Interface

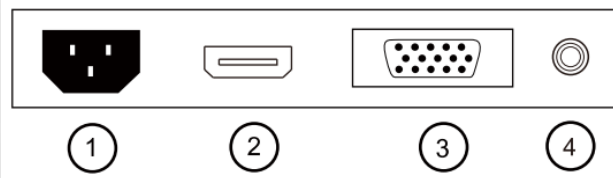

NO.	Description
1	Power Interface
2	HDMI input interface
3	VGA input interface
4	Audio input interface



# DS-D5019QD 19" LCD Monitor



Model	DS-D5019QD	
Display Type	TFT-LED Backlight	
Screen Size	18.5"	
Dot Pitch (H×V)	0.300mm×0.300mm (0.012"×0.012")	
Max Resolution	1366×768	
Brightness	250cd/m <sup>2</sup>	
Contrast	1000:1	
Response Time	5ms	
Color	16.7M	
Viewable Area (H×V)	409.8mm×230.4mm (16.13"×9.07")	
Viewing Angle	Horizontal 170°, Vertical 160°	
Interfaces	HDMI Input	1
	VGA Input	1
	Audio Input	1
Power Supply	100 ~ 240V AC, 50/60HZ	
Consumption	≤20W	
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Operating Humidity	10%~85% (No Condensation)	
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)	
Bezel Material	Plastic	
Bezel Color	Black	
Dimension (W×H×D) Without Bracket	444.89mm×274.99mm×32.96mm (17.52"×10.83"×1.30")	