

## DS-D5022F2-1V1S 21.5 inch FHD Borderless Monitor



- Ultra-thin device body with 3 ultra-narrow sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

## ▪ Specification

	Model	DS-D5022F2-1V1S
<b>Display</b>	Screen Size	21.45 inch
	Active Display Area	478.656 (H) mm × 260.280 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.241 mm (H) × 0.241 mm (V)
	Brightness	250 cd/m <sup>2</sup>
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit, 16.7 M
	Contrast Ratio	3000:1
	Response Time	6.5 ms
	Refresh Rate	Max. 75Hz , Typ. 60 Hz
	Haze	Haze 25%, 3H
	Reliability	7 × 24 H
	Color Gamut	72% NTSC
<b>Interface</b>	Video & Audio Input	HDMI 1.4 × 1, VGA × 1, Audio Input × 1
	Video & Audio Output	Speaker × 2 (6 Ω 2 W)
	Data Transmission Interface	None
	Control Interface	None
<b>Power</b>	Power Supply	12 VDC, 2.5 A
	Power Consumption	≤ 25 W
	Standby Consumption	≤ 0.5 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 90% RH (Non-Condensing)

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com




Follow us on social media to get the latest product and solution information.




<b>General</b>	Casing Material	Plastic
	VESA	100 mm × 100 mm (4 - M4 × 10 mm)
	Bezel Width	2.0 mm (top/left/right), 21.0 mm (bottom)
	Product Dimensions (W × H × D)	With base: 491.8 (W) mm × 373.2 (H) mm × 167.4 (D) mm (19.362" × 14.693" × 6.591") Without base: 491.8 (W) mm × 289.5(H) mm × 37.3 (D) mm (19.362" × 11.398" × 1.469")
	Package Dimensions (W × H × D)	542 (W) mm × 353 (H) mm × 110 (D) mm (21.34" × 13.9" × 4.331")
	Net Weight	2.3 ± 0.5 kg
	Gross Weight	3.2 ± 0.5 kg
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.5 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
	Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

## Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
Audio In	3.5mm audio input interface	DC	12 VDC 2.5 A input interface



HDMI



VGA



Audio In



DC

## Available Model

DS-D5022F2-1V1S

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

▪ **Dimension**

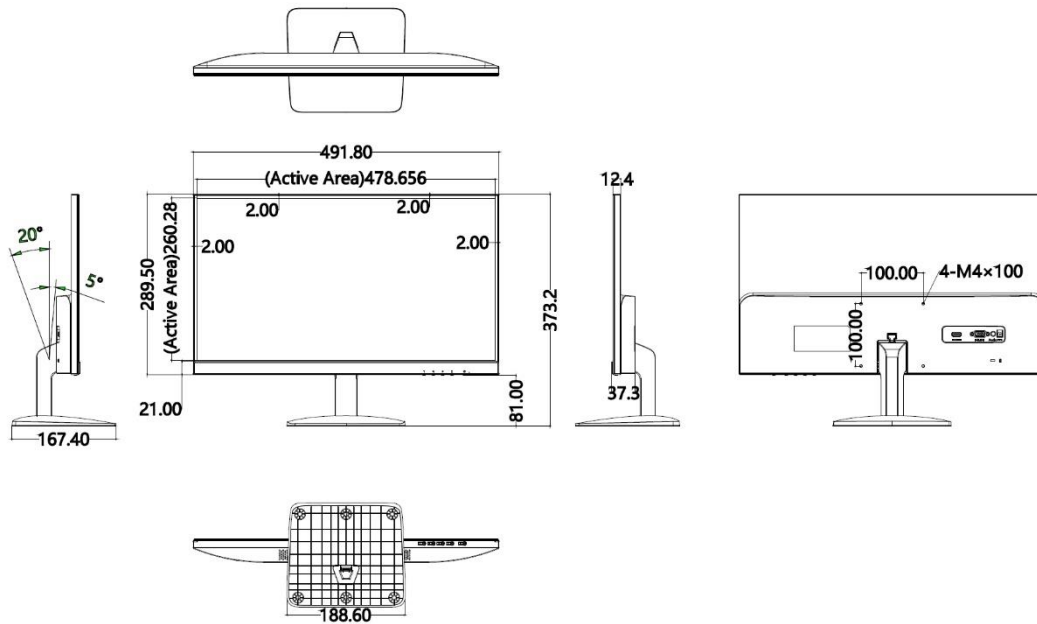

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.

