


**PL6731****HANDS-FREE PEOPLE DOOR ENTRY MONITOR 5. SB2**

People series colour door entry monitor for Simplebus 2 system. Hands-free version with 5-inch / 16:9 screen. Even when switched off, the video door entry monitor can be programmed using a smartphone and the MyComelit app, which can be downloaded free of charge. It is supplied with a metal surface-mounted backplate, which ensures it is firmly and securely anchored, and with a line distribution terminal. It has 6 mechanical buttons on the front panel with icons identifying the factory-set function. 3 of the buttons are backlit to ensure ease of use: green for the 'audio' function, red for the 'end communication' function, and white for the 'electric lock' function. 3 buttons are programmable and pre-configured to display images from the video memory, to control an actuator, and to perform self activation. The buttons at the centre of each row are tactile to guide visually impaired people. On the right side of the door entry monitor, on the other hand, there are buttons to activate the Silent mode with a red indicator light and related icon, as well as buttons to access the menu for adjusting brightness, contrast, colour and the ringtone volume. It comes as standard with the floor door call, which can also be programmed for other functions. Dimensions (L x H x D): 135 x 170 x 23 mm

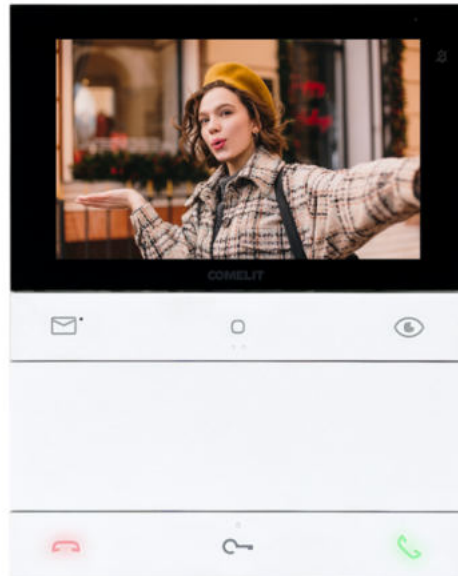

PL6731

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 5. SB2

GENERAL DATA

| | |
|-----------------------------|---------------------------------|
| Height (mm) | 170 |
| Width (mm) | 135 |
| Depth (mm) | 23 |
| Product weight (g) | 430 |
| Product color | White RAL9003, Black RAL9005 |
| Type of finishing materials | ABS, PMMA |
| Wall-mounted | Yes |
| Desk base-mounted | Yes, with a dedicated accessory |

COMPATIBLE SYSTEMS

| | |
|---|-----|
| Audio/video Simplebus 2 with power supply art. 4888C | Yes |
| Audio/video Simplebus 2 with power supply art. 1210/1210A | Yes |
| Simplebus 2 audio/video kit with power supply art. 1209 | Yes |

DISPLAY

| | |
|---------------------|---------|
| Display size (") | 5 |
| Type of display | TFT |
| Aspect Ratio | 16:9 |
| Resolution (pixels) | 800x480 |
| OSD menu | Yes |

AUDIO FEATURES

| | |
|-------------|--------------------------|
| Type | Hands-free |
| Microphone | 6mm (Ø), Omnidirectional |
| Loudspeaker | 36mm (Ø), 40 Ohm, 1W |

ELECTRICAL CHARACTERISTICS

| | |
|----------------------|--|
| Type of power supply | Power supply from video door entry bus |
|----------------------|--|



PL6731

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 5. SB2

ELECTRICAL CHARACTERISTICS

| | |
|----------------------------|-------|
| Supply voltage | 33VDC |
| Absorption in stand-by (W) | 0.04 |
| Maximum absorption (W) | 9.9 |

HARDWARE FEATURES

| | |
|-----------------------|-------------------|
| Type of buttons | Mechanical |
| Total buttons (n°) | 6 |
| Backlight colour | Green, White, Red |
| Clamps | L L CFP CFP |
| Removable terminals | Yes |
| Number of inputs (n°) | 1 |

SETTINGS

| | |
|---------------------------|-----|
| Loudspeaker volume | Yes |
| Ringtone volume | Yes |
| Screen brightness control | Yes |
| Screen contrast | Yes |
| Screen colour | Yes |

NETWORK AND COMMUNICATION PROTOCOLS

| | |
|--|-----|
| Programming user functions via OSD menu | Yes |
| Programming installer functions via OSD menu | Yes |
| Function programming via NFC and MyComelit app | Yes |

ENVIRONMENTAL AND COMPLIANCE FEATURES

| | |
|---------------------------------|---------|
| IP protection rating | IP30 |
| Operating temperature (°C) | 5 ÷ 40 |
| Operating humidity (RH max) (%) | 25 ÷ 75 |



PL6731

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 5. SB2

ENVIRONMENTAL AND COMPLIANCE FEATURES

| | |
|---------------------|--|
| Environmental class | I (B1) |
| Certifications | RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011) |

GENERAL FEATURES

| | |
|---|-----|
| Door opener | Yes |
| Automatic door opening on call (Doctor) | Yes |
| Silent mode (Privacy) | Yes |
| Self Activation | Yes |
| CPS call | Yes |
| Intercom calls | Yes |
| Selective intercom call | Yes |
| Panic call | Yes |
| Outside door call input | Yes |
| Customisable ringtone | Yes |
| Automatic answer (handsfree) | Yes |
| Video memory | Yes |
| Actuator control | Yes |
| Door open signaling | Yes |
| Acoustic signalling | Yes |
| Visual signalling | Yes |
| Date/time display | Yes |

**PL6731****HANDS-FREE PEOPLE DOOR ENTRY MONITOR 5. SB2****ACCESSORIES****AC6711 MONITOR ADAPTER FRAME**

Adapter frame for People series door entry monitor, for use where door entry monitors from the previous series are replaced, to fine-tune the mounting process. Dimensions (L x H x D): 230 x 220 x 3 mm

**AC6732 DESK BASE FOR MONITOR**

Desk base installation accessory for People series door entry monitors. Dimensions (L x H x D): 135.65 x 110 x 122.5 mm

**AC6720 WALL SUPPORT FOR HANDS-FREE MONITOR**

Wall mount for People series hands-free door entry monitors, allowing external routing of cables. Dimensions (L x H x D): 135.4 x 158 x 17.1 mm